

### **Features**

- Built-In Bias Resistors Enable the Configuration of an Inverter • Circuit Without Connecting External Input Resistors
- Only the On/Off Conditions Need to Be Set For Operation, Making **Device Design Easy**
- Halogen Free. "Green" Device (Note 1)
- AEC-Q101 Qualified
- Moisture Sensitivity Level 1

**Parameter** 


Supply Voltage

Input Voltage

**Output Current** 

- Epoxy Meets UL 94 V-0 Flammability Rating
- Lead Free Finish/RoHS Compliant ("P" Suffix Designates RoHS . Compliant. See Ordering Information)



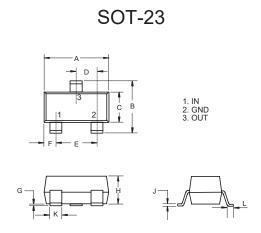

	Power Dissipation	P <sub>D</sub>		200		mW	Ī	К	-		Ť	
	Junction Temperature	T,			150	°C			DIN	IENSIO	NS	
	•						DIM	INCHES		MM		NOTE
	Storage Temperature	T <sub>stg</sub>	-55		150	°C	DIN	MIN	MAX	MIN	MAX	NOTE
	A 0.110 0.120 2.80 3.04						3.04					
Nc			e defined as those which contain <900ppm bromine, Br + Cl) and 1100ppm antimage and a									
	<900ppm chlorine (<1500ppm t	otal Br + Cl) a	nd <1000p	pm antimor	ny compour	nds.	С	0.047	0.055	1.20	1.40	
							D	0.034	0.041	0.85	1.05	
							E	0.067	0.083	1.70	2.10	
							F	0.018	0.024	0.45	0.60	
							G	0.0004	0.006	0.01	0.15	
							Н	0.035	0.043	0.90	1.10	

0.003 0.007

0.012 0.020

0.007 0.020 0.20

# Maximum Ratings @ 25°C Unless Otherwise Specified

Min

---

-10

\_\_\_\_

---

Тур

50

\_\_\_\_

30

100

Unit

V

V

mΑ

mΑ

J

Κ

Max

---

40

----

Symbol


 $V_{CC}$ 

 $V_{IN}$ 


 $I_0$ 

I<sub>c(Max)</sub>

**Device Marking** 



#### **Internal Structure**




#### Suggested Solder Pad Layout

0.08

0.30

0.18

0.51 0.50






# Electrical Characteristics @ 25°C Unless Otherwise Specified

Parameter	Symbol	Min	Тур	Max	Unit	Conditions
Input Voltage	V <sub>I(off)</sub>	0.5			V	V <sub>CC</sub> =5V, I <sub>O</sub> =100µA
Input Voltage	V <sub>I(on)</sub>			3.0	V	V <sub>0</sub> =0.2V, I <sub>0</sub> =5mA
Output Voltage	V <sub>O(on)</sub>			0.3	V	I <sub>o</sub> =10mA,I <sub>I</sub> =0.5mA
Input Current	I <sub>I</sub>			0.36	mA	V <sub>I</sub> =5V
Output Current	I <sub>O(off)</sub>			0.5	μA	V <sub>CC</sub> =50V, V <sub>I</sub> =0
DC Current Gain	Gı	56				V <sub>o</sub> =5V, I <sub>o</sub> =5mA
Input Resistance	R <sub>1</sub>	15.4	22	28.6	KΩ	
Resistance Ratio	$R_2/R_1$	0.8	1.0	1.2		
Transition Frequency	f <sub>T</sub>		250		MHz	V <sub>CE</sub> =10V, I <sub>E</sub> =5mA, f=100MHz



# **Curve Characteristics**

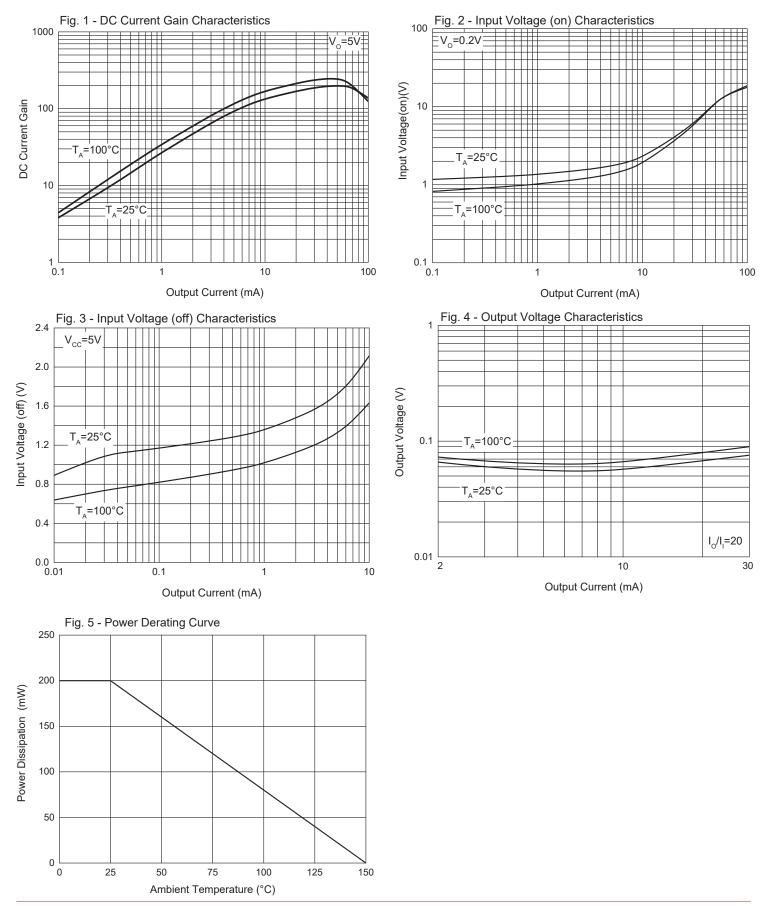



## **Ordering Information**

Device	Packing
DTC124ECAHE3-TP	Tape&Reel:3Kpcs/Reel

### \*\*\*IMPORTANT NOTICE\*\*\*

*Micro Commercial Components Corp.* reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. *Micro Commercial Components Corp*. does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold *Micro Commercial Components Corp*. and all the companies whose products are represented on our website, harmless against all damages. *Micro Commercial Components Corp*. products are sold subject to the general terms and conditions of commercial sale, as published at

https://www.mccsemi.com/Home/TermsAndConditions.

### \*\*\*LIFE SUPPORT\*\*\*

MCC's products are not authorized for use as critical components in life support devices or systems without the express written approval of Micro Commercial Components Corporation.

#### \*\*\*CUSTOMER AWARENESS\*\*\*

Counterfeiting of semiconductor parts is a growing problem in the industry. Micro Commercial Components (MCC) is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. MCC strongly encourages customers to purchase MCC parts either directly from MCC or from Authorized MCC Distributors who are listed by country on our web page cited below. Products customers buy either from MCC directly or from Authorized MCC Distributors are genuine parts, have full traceability, meet MCC's quality standards for handling and storage. **MCC will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources**. MCC is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.