

Obsolete



Micro Commercial Components



Micro Commercial Components
20736 Marilla Street Chatsworth
CA 91311
Phone: (818) 701-4933
Fax: (818) 701-4939

MCL4448

500mW 100 Volt Silicon Epitaxial Diode

Features

- Silicon epitaxial planar diode
- Fast Switching diodes
- 500mW power dissipation
- This diode is also available in the DO-35 case with the type designation 1N4448, in the Minimelf case with the type designation DL4448
- Lead Free Finish/Rohs Compliant (Note1) ("P" Suffix designates Compliant. See ordering information)

Maximum Ratings

- Operating Temperature: -55°C to +150°C
- Storage Temperature: -55°C to +150°C
- Maximum Thermal Resistance; 350K/W Junction To Ambient
- Epoxy meets UL 94 V-0 flammability rating
- Moisture Sensitivity Level 1


Electrical Characteristics @ 25°C Unless Otherwise Specified

Reverse Voltage	V_R	75V	
Peak Reverse Voltage	V_{RM}	100V	
Average Rectified Current	I_{AV}	150mA	Resistive Load $f > 50\text{Hz}$
Power Dissipation	P_{TOT}	500mW ¹⁾	$T_A=25^\circ\text{C}$
Junction Temperature	T_J	150°C	
Surge Forward Current	I_{FSM}	500mA	$t < 1\text{S}, T_J=25^\circ\text{C}$
Instantaneous Forward Voltage	V_F	1.0V(MAX) 0.62-0.72V	$I_{FM} = 100\text{mA};$ $I_{FM} = 5.0\text{mA}$
Maximum DC Reverse Current At Rated DC Blocking Voltage	I_R	25nA 5.0uA 50uA	$T_J=25^\circ\text{C}, V_R=20\text{V}$ $V_R=75\text{V},$ $V_R=20\text{V } T_J=150^\circ\text{C}$
Minimum Reverse Breakdown Voltage	$V_{(BR)R}$	100V	Tested with 100uA puse
Typical Junction Capacitance	C_J	4.0pF	Measured at $V_R=V_F=0\text{V}$
Reverse Recovery Time	T_{rr}	4.0nS	$I_F=10\text{mA},$ $V_R = 6.0\text{V}$ $R_L=100\text{OHMS}$

1) Valid provided that leads at a distance of 8mm from case are kept at ambient temperature(DO-35)


Note: 1. Lead in Glass Exemption Applied, see EU Directive Annex 5.

MICROMELF

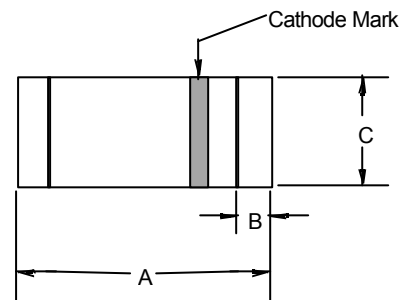


DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	.071	.079	1.8	2.0	
B	.004	.008	.10	.20	
C	.047	.051	1.20	1.30	∅

SUGGESTED SOLDER PAD LAYOUT

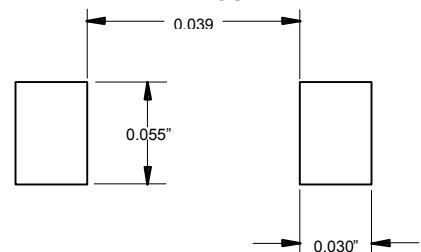


MCL4448

Figure 1
Typical Forward Characteristics

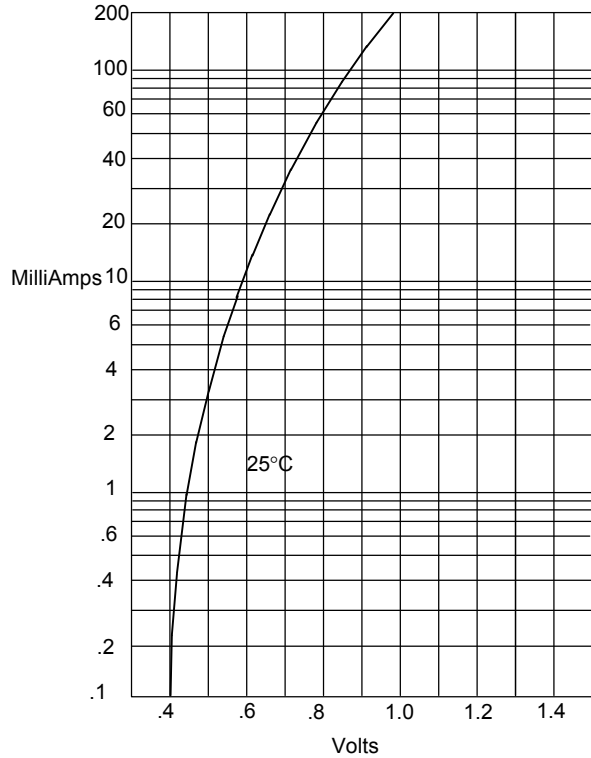


Instantaneous Forward Current - Amperes *versus*
Instantaneous Forward Voltage - Volts

Figure 2
Forward Derating Curve

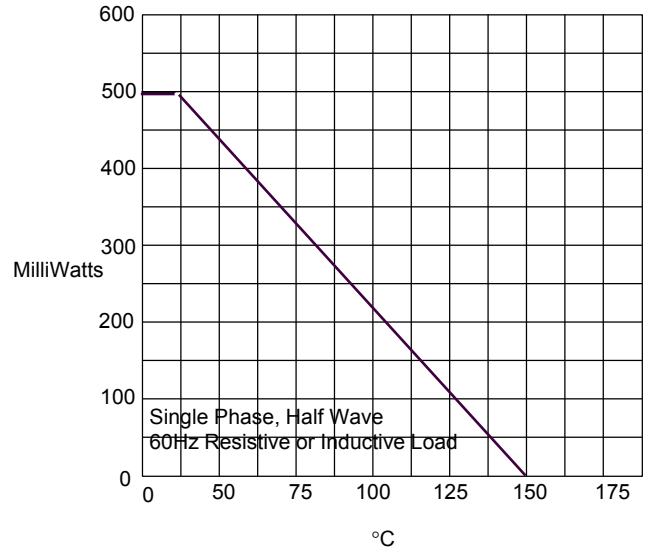

Admissible Power Dissipation - MilliWatts *versus*
Ambient Temperature - °C

Figure 3
Junction Capacitance

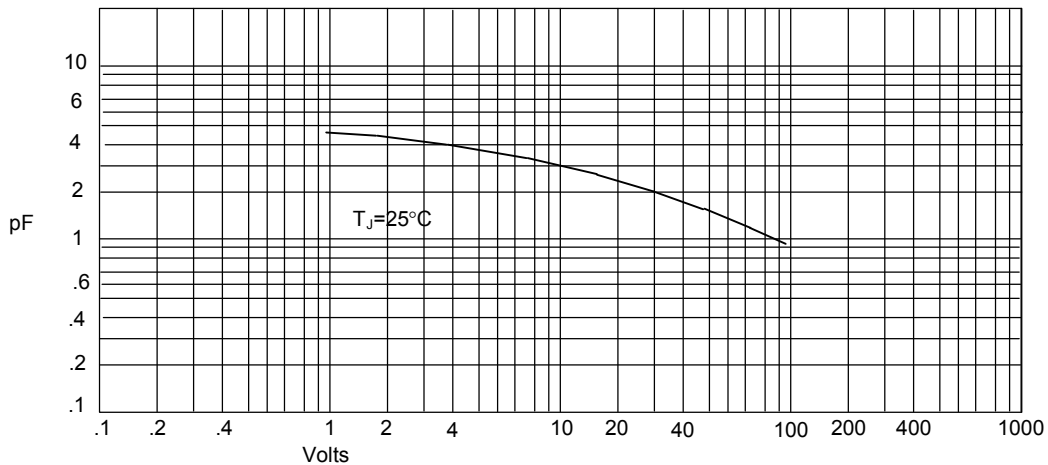


Junction Capacitance - pF *versus*
Reverse Voltage - Volts

MCL4448



Figure 4
Typical Reverse Characteristics

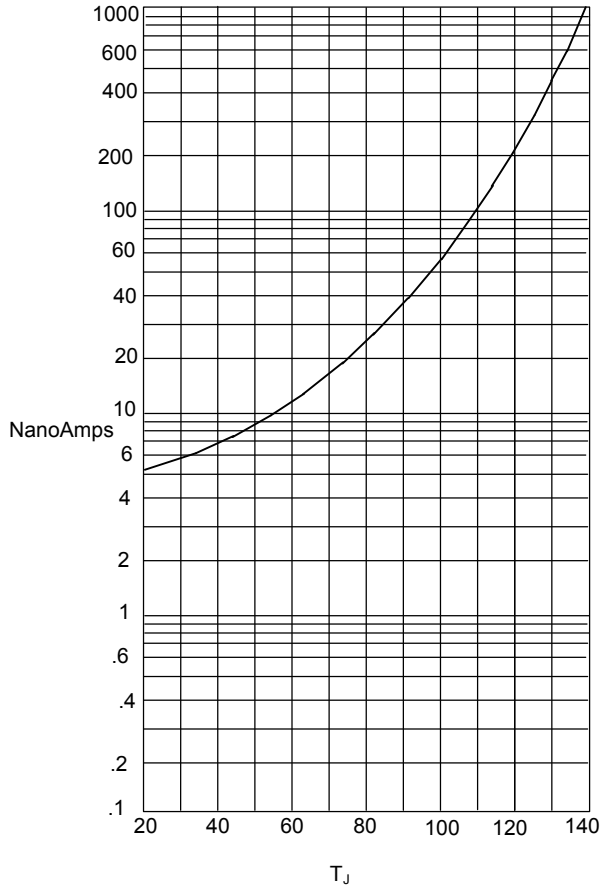


Instantaneous Reverse Leakage Current - NanoAmperes versus Junction Temperature - °C

$T_A=25^{\circ}\text{C}$
 $T_A=100^{\circ}\text{C}$

Micro Commercial Components

Figure 5
Peak Forward Surge Current

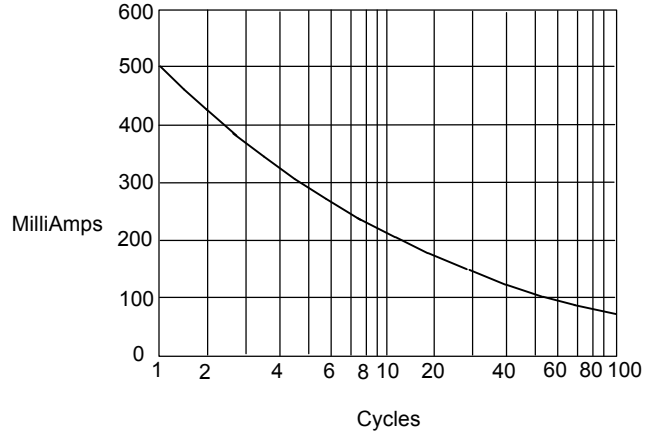

Peak Forward Surge Current - Amperes versus Number Of Cycles At 60Hz - Cycles



TM

Micro Commercial Components

Ordering Information :

Device	Packing
Part Number-TP	Tape&Reel: 2.5Kpcs/Reel

*****IMPORTANT NOTICE*****

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications , enhancements , improvements , or other changes . **Micro Commercial Components Corp .** does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights ,nor the rights of others . The user of products in such applications shall assume all risks of such use and will agree to hold **Micro Commercial Components Corp .** and all the companies whose products are represented on our website, harmless against all damages.

*****LIFE SUPPORT*****

MCC's products are not authorized for use as critical components in life support devices or systems without the express written approval of Micro Commercial Components Corporation.

*****CUSTOMER AWARENESS*****

Counterfeiting of semiconductor parts is a growing problem in the industry. Micro Commercial Components (MCC) is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. MCC strongly encourages customers to purchase MCC parts either directly from MCC or from Authorized MCC Distributors who are listed by country on our web page cited below. Products customers buy either from MCC directly or from Authorized MCC Distributors are genuine parts, have full traceability, meet MCC's quality standards for handling and storage. **MCC will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources.** MCC is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.