	<b>E480232</b>
---	----------------

### Features

- AEC-Q101 Qualified
- For Surface Mount Applications
- Excellent Clamping Capability
- Fast Response Time: Typical Less Than 1ps From 0V to  $V_{BR}$  min
- High Temp Soldering: 260°C / 10 Seconds at Terminals
- Halogen Free. "Green" Device (Note 1)
- Moisture Sensitivity Level 1
- Epoxy Meets UL 94 V-0 Flammability Rating
- Lead Free Finish/RoHS Compliant (Note 2) ("P" Suffix Designates RoHS Compliant. See Ordering Information)





### Maximum Ratings

Parameter	Symbol	Value	Unit
Peak Pulse Power Surge Current with a 10/1000µs Waveform (Note 3)	$I_{PPM}$	See Next Table	A
Peak Pulse Power Dissipation (Note 3)	$P_{PPM}$	600	W
Power Dissipation on Infinite Heatsink at $T_L = 75^\circ\text{C}$	$P_D$	5.0	W
Peak Forward Surge Current Unidirectional Only (Note 4)	$I_{FSM}$	100	A

#### Note:

1. Halogen free "Green" products are defined as those which contain <900ppm bromine, <900ppm chlorine (<1500ppm total Br + Cl) and <1000ppm antimony compounds.
2. High Temperature Solder Exemption Applied, see EU Directive Annex 7a.
3. Non-repetitive current pulse, per Fig.3 and derated above  $T_A = 25^\circ\text{C}$  per Fig.4.
4. 8.3ms, single half sine wave duty cycle = 4 pulses per Minutes maximum.


### Internal Structure

Description	Simplified outline	Graphic symbol
Uni-directional		
Bi-directional		

XXXX = Marking code YYWW = Date Code


**600Watt TVS**  
**5.0 to 190**  
**Volts**

**SMB (DO-214AA)**  
**(LEAD FRAME)**

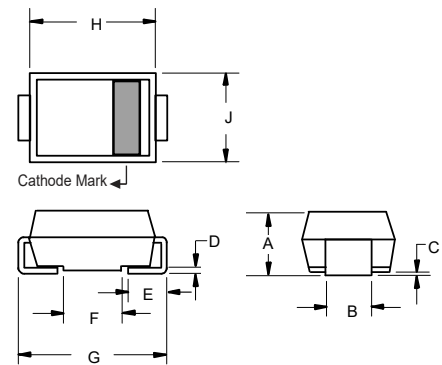

DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	0.079	0.103	2.00	2.62	
B	0.075	0.087	1.91	2.21	
C	0.002	0.008	0.05	0.20	
D	0.006	0.012	0.15	0.31	
E	0.030	0.060	0.76	1.52	
F	0.065	0.091	1.65	2.32	
G	0.200	0.220	5.08	5.59	
H	0.160	0.191	4.06	4.85	
J	0.130	0.155	3.30	3.94	

#### Suggested Solder Pad Layout

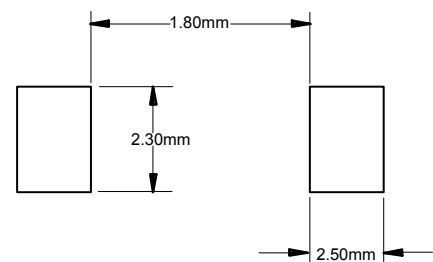

## Thermal Characteristics

Parameter	Symbol	Value	Unit
Operating Junction Temperature Range	$T_J$	-55 to +175	°C
Storage Temperature Range	$T_{STG}$	-55 to +175	°C
Typical Thermal Resistance Junction to Lead	$R_{\theta JL}$	20	°C/W
Typical Thermal Resistance Junction to Ambient	$R_{\theta JA}$	100	°C/W
Typical Thermal Resistance Junction to Case	$R_{\theta JC}$	25	°C/W

**Note:**

5. Mounted on 0.2 x 0.2" (5.0 x 5.0 mm) copper pads to each terminal.

Electrical Characteristics @ 25°C Unless Otherwise Specified

MCC Part Number		Working Peak Reverse Voltage $V_{RWM}$ (V)	Breakdown Voltage $V_{BR}$ @ $I_T$			Maximum Clamping Voltage @ $I_{PP}$ $V_C$ (V)	Maximum Reverse Surge Current $I_{PP}$ (A)	Maximum Reverse Leakage @ $V_{RWM}$ $I_R$ ( $\mu$ A)	Device Marking Code	
(Uni)	(Bi)		Min (V)	Max (V)	$I_T$ (mA)				Uni	Bi
SMBJ5.0AHE3	SMBJ5.0CAHE3	5	6.40	7.07	10	9.2	65.2	800	KE	AE
SMBJ6.0AHE3	SMBJ6.0CAHE3	6	6.67	7.37	10	10.3	58.3	800	KG	AG
SMBJ6.5AHE3	SMBJ6.5CAHE3	6.5	7.22	7.98	10	11.2	53.6	500	KK	AK
SMBJ7.0AHE3	SMBJ7.0CAHE3	7	7.78	8.60	10	12.0	50.0	200	KM	AM
SMBJ7.5AHE3	SMBJ7.5CAHE3	7.5	8.33	9.21	1	12.9	46.5	100	KP	AP
SMBJ8.0AHE3	SMBJ8.0CAHE3	8	8.89	9.83	1	13.6	44.1	50	KR	AR
SMBJ8.5AHE3	SMBJ8.5CAHE3	8.5	9.44	10.40	1	14.4	41.7	10	KT	AT
SMBJ9.0AHE3	SMBJ9.0CAHE3	9	10.00	11.10	1	15.4	39.0	5	KV	AV
SMBJ10AHE3	SMBJ10CAHE3	10	11.10	12.30	1	17.0	35.3	1	KX	AX
SMBJ11AHE3	SMBJ11CAHE3	11	12.20	13.50	1	18.2	33.0	1	KZ	AZ
SMBJ12AHE3	SMBJ12CAHE3	12	13.30	14.70	1	19.9	30.2	1	LE	BE
SMBJ13AHE3	SMBJ13CAHE3	13	14.40	15.90	1	21.5	27.9	1	LG	BG
SMBJ14AHE3	SMBJ14CAHE3	14	15.60	17.20	1	23.2	25.8	1	LK	BK
SMBJ15AHE3	SMBJ15CAHE3	15	16.70	18.50	1	24.4	24.0	1	LM	BM
SMBJ16AHE3	SMBJ16CAHE3	16	17.80	19.70	1	26.0	23.1	1	LP	BP
SMBJ17AHE3	SMBJ17CAHE3	17	18.90	20.90	1	27.6	21.7	1	LR	BR
SMBJ18AHE3	SMBJ18CAHE3	18	20.00	22.10	1	29.2	20.5	1	LT	BT
SMBJ20AHE3	SMBJ20CAHE3	20	22.20	24.50	1	32.4	18.5	1	LV	BV
SMBJ22AHE3	SMBJ22CAHE3	22	24.40	26.90	1	35.5	16.9	1	Lx	Bx
SMBJ24AHE3	SMBJ24CAHE3	24	26.70	29.50	1	38.9	15.4	1	LZ	BZ
SMBJ26AHE3	SMBJ26CAHE3	26	28.90	31.90	1	42.1	14.2	1	ME	CE
SMBJ28AHE3	SMBJ28CAHE3	28	31.10	34.40	1	45.4	13.2	1	MG	CG
SMBJ30AHE3	SMBJ30CAHE3	30	33.30	36.80	1	48.4	12.4	1	MK	CK
SMBJ33AHE3	SMBJ33CAHE3	33	36.70	40.60	1	53.3	11.3	1	MM	CM
SMBJ36AHE3	SMBJ36CAHE3	36	40.00	44.20	1	58.1	10.3	1	MP	CP
SMBJ40AHE3	SMBJ40CAHE3	40	44.40	49.10	1	64.5	9.3	1	MR	CR
SMBJ43AHE3	SMBJ43CAHE3	43	47.80	52.80	1	69.4	8.6	1	MT	CT
SMBJ45AHE3	SMBJ45CAHE3	45	50.00	55.30	1	72.7	8.3	1	MV	CV
SMBJ48AHE3	SMBJ48CAHE3	48	53.30	58.90	1	77.4	7.7	1	Mx	Cx
SMBJ51AHE3	SMBJ51CAHE3	51	56.70	62.70	1	82.4	7.3	1	MZ	CZ
SMBJ54AHE3	SMBJ54CAHE3	54	60.00	66.30	1	87.1	6.9	1	NE	DE
SMBJ58AHE3	SMBJ58CAHE3	58	64.40	71.20	1	93.6	6.4	1	NG	DG
SMBJ60AHE3	SMBJ60CAHE3	60	66.70	73.70	1	96.8	6.2	1	NK	DK
SMBJ64AHE3	SMBJ64CAHE3	64	71.10	78.60	1	103.0	5.8	1	NM	DM
SMBJ70AHE3	SMBJ70CAHE3	70	77.80	86.00	1	113.0	5.3	1	NP	DP
SMBJ75AHE3	SMBJ75CAHE3	75	83.30	92.10	1	121.0	4.9	1	NR	DR
SMBJ78AHE3	SMBJ78CAHE3	78	86.70	95.80	1	126.0	4.7	1	NT	DT
SMBJ80AHE3	SMBJ80CAHE3	80	88.80	97.60	1	129.6	4.6	1	NU	DU
SMBJ85AHE3	SMBJ85CAHE3	85	94.40	104.00	1	137.0	4.4	1	NV	DV
SMBJ90AHE3	SMBJ90CAHE3	90	100.00	111.00	1	146.0	4.1	1	NX	DX
SMBJ100AHE3	SMBJ100CAHE3	100	111.00	123.00	1	162.0	3.7	1	NZ	DZ
SMBJ110AHE3	SMBJ110CAHE3	110	122.00	135.00	1	177.0	3.4	1	PE	EE
SMBJ120AHE3	SMBJ120CAHE3	120	133.00	147.00	1	193.0	3.1	1	PG	EG
SMBJ130AHE3	SMBJ130CAHE3	130	144.00	159.00	1	209.0	2.9	1	PK	EK
SMBJ140AHE3	SMBJ140CAHE3	140	155.00	171.00	1	226.8	2.6	1	PL	EL
SMBJ150AHE3	SMBJ150CAHE3	150	167.00	185.00	1	243.0	2.5	1	PM	EM
SMBJ160AHE3	SMBJ160CAHE3	160	178.00	197.00	1	259.0	2.3	1	PP	EP
SMBJ170AHE3	SMBJ170CAHE3	170	189.00	209.00	1	275.0	2.2	1	PR	ER
SMBJ180AHE3	SMBJ180CAHE3	180	201.00	222.00	1	292.0	2.1	1	PT	ET
SMBJ190AHE3	SMBJ190CAHE3	190	211.00	232.00	1	307.8	2.0	1	PU	EU

**Curve Characteristics**

Fig. 1 - Peak Pulse Power Rating Curve

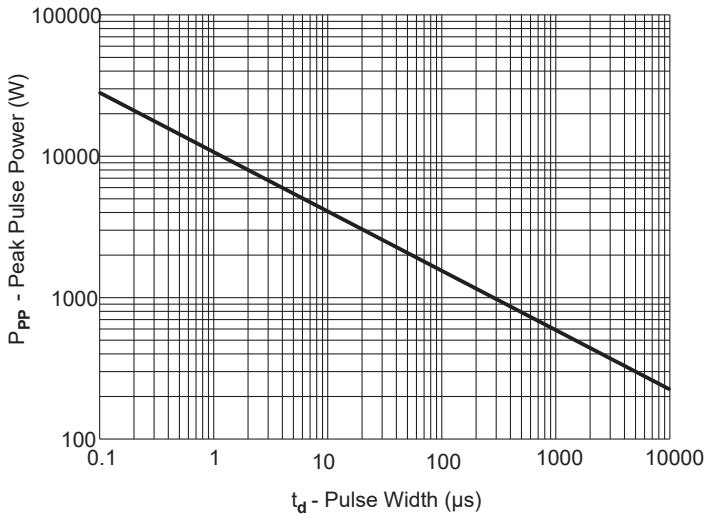


Fig. 2 - Typical Junction Capacitance

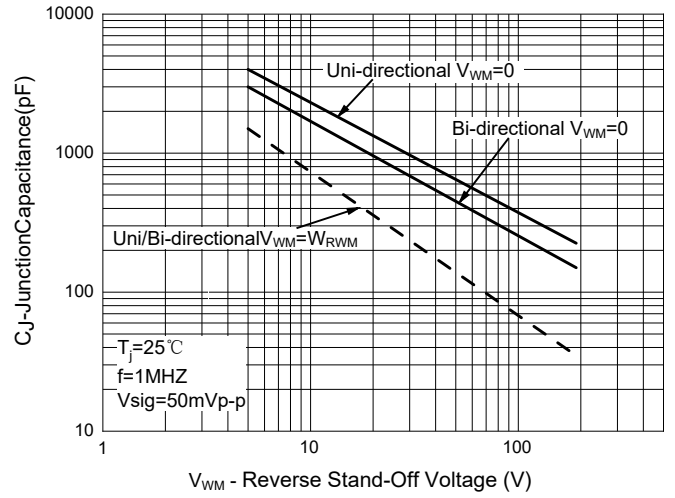


Fig. 3 - Pulse Waveform


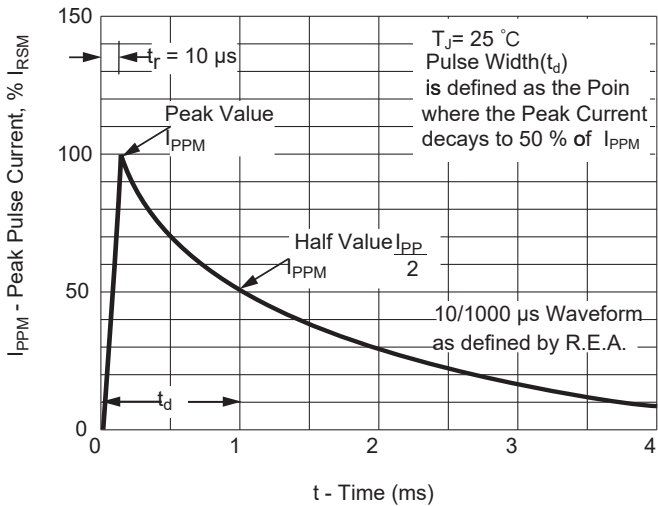


Fig. 4 - Pulse Derating Curve

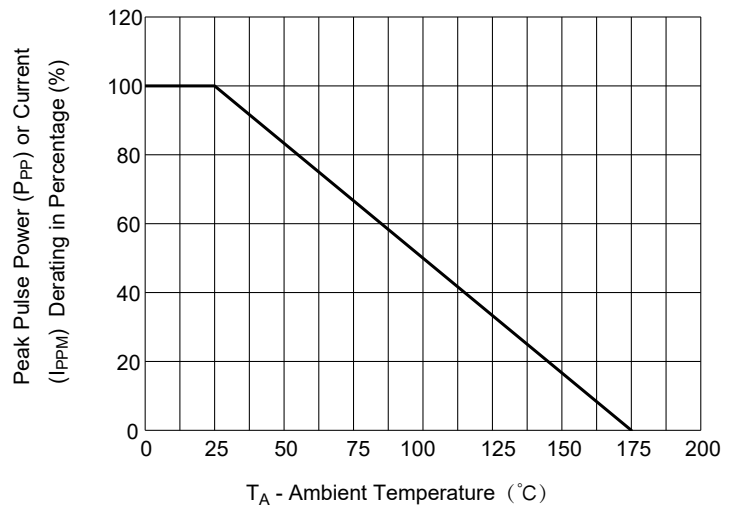

## Ordering Information

Device	Packing
Part Number-TP	Tape&Reel:3Kpcs/Reel

**\*\*\*IMPORTANT NOTICE\*\*\***

*Micro Commercial Components Corp.* reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. *Micro Commercial Components Corp.* does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold *Micro Commercial Components Corp.* and all the companies whose products are represented on our website, harmless against all damages. *Micro Commercial Components Corp.* products are sold subject to the general terms and conditions of commercial sale, as published at <https://www.mccsemi.com/Home/TermsAndConditions>.

**\*\*\*LIFE SUPPORT\*\*\***

MCC's products are not authorized for use as critical components in life support devices or systems without the express written approval of Micro Commercial Components Corporation.

**\*\*\*CUSTOMER AWARENESS\*\*\***

Counterfeiting of semiconductor parts is a growing problem in the industry. Micro Commercial Components (MCC) is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. MCC strongly encourages customers to purchase MCC parts either directly from MCC or from Authorized MCC Distributors who are listed by country on our web page cited below. Products customers buy either from MCC directly or from Authorized MCC Distributors are genuine parts, have full traceability, meet MCC's quality standards for handling and storage. **MCC will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources.** MCC is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.