


1-Line Uni-directional Standard ESD

Features

- Transient protection :
 - IEC 61000-4-2 (ESD) $\pm 30\text{kV}$ (Air), $\pm 30\text{kV}$ (Contact)
 - IEC 61000-4-5 (Lightning) 25A~125A (8/20 μs)
- Uni-directional ESD protection of one line
- Reverse working voltage, V_{RWM} : 5V~36V
- Low clamping voltage
- Low reverse leakage current
- Solid-state silicon-avalanche

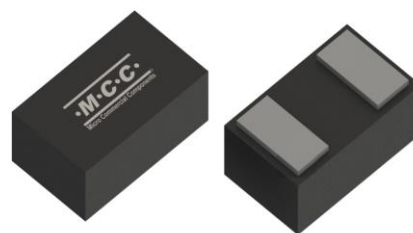

DFN1610-2






Applications

- Battery Protection
- USB VBus
- Power Line Protection
- Hand Held Portable Applications

Mechanical Data

- Package: DFN1610-2
- Moisture Sensitivity Level 1, per J-STD-020
- Halogen Free. "Green" Device (Note1)
- Epoxy Meets UL 94 V-0 Flammability Rating
- Lead Free Finish/RoHS Compliant ("P" Suffix Designates RoHS Compliant. See Ordering Information)

Body Marking and Pin Layout

Marking Code	Simplified Outline	Internal Structure												
<div></div> <table><thead><tr><th>MCC Part No.</th><th>Device Marking</th></tr></thead><tbody><tr><td>ESD0571P6</td><td>91</td></tr><tr><td>ESD0771P6</td><td>76</td></tr><tr><td>ESD1271P6</td><td>72</td></tr><tr><td>ESD2471P6</td><td>74</td></tr><tr><td>ESD3671P6</td><td>79</td></tr></tbody></table>	MCC Part No.	Device Marking	ESD0571P6	91	ESD0771P6	76	ESD1271P6	72	ESD2471P6	74	ESD3671P6	79	<div></div> <div>Transparent top view</div>	<div></div>
MCC Part No.	Device Marking													
ESD0571P6	91													
ESD0771P6	76													
ESD1271P6	72													
ESD2471P6	74													
ESD3671P6	79													

Ordering Information

Product Name	Packing info
ESD0571P6-TP THRU ESD3671P6-TP	3K pcs/reel

For packaging details, visit our website at <https://www.mccsemi.com/Package/List>

1-Line Uni-directional Standard ESD

Maximum Ratings (T_A=25°C unless otherwise specified)


Parameter		Symbol	Rating	Unit
IEC61000-4-2(ESD)	Air	V _{ESD}	±30	kV
	Contact	V _{ESD}	±30	kV
Peak Pulse Power (8/20μs) (Note 2)		P _{PK}	1875	W
Operating Temperature Range		T _J	-55 to +125	°C
Storage Temperature Range		T _{STG}	-55 to +150	°C

Note:

1. Halogen free "Green" products are defined as those which contain <900ppm bromine, <900ppm chlorine (<1500ppm total Br + Cl) and 1000ppm antimony compounds.
2. Non-repetitive current pulse 8/20μs exponential decay waveform according to IEC61000-4-5.

Parameter Definition

Symbol	Parameter
V _{RWM}	Peak Reverse Working Voltage
I _R	Reverse Leakage Current @ V _{RWM}
V _{BR}	Breakdown Voltage @ I _T
I _T	Test Current
I _{PP}	Maximum Reverse Peak Pulse Current
V _C	Clamping Voltage @ I _{PP}
P _{PK}	Peak Pulse Power
C _J	Junction Capacitance
I _F	Forward Current
V _F	Forward Voltage @ I _F

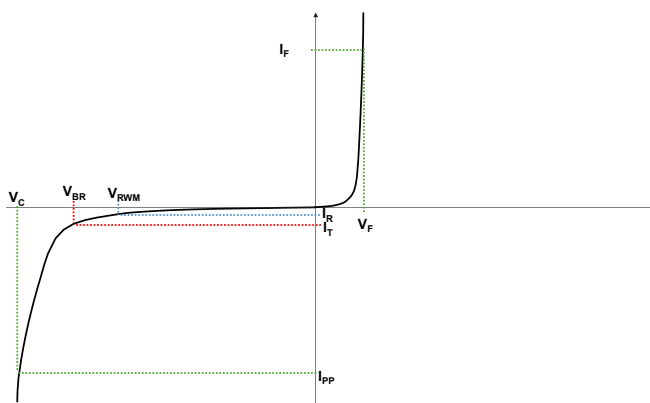

Electrical Characteristics ($T_A=25^{\circ}\text{C}$ unless otherwise specified)

ESD0571P6

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Reverse Working Voltage	V_{RWM}				5	V
Reverse Breakdown Voltage	V_{BR}	$I_T = 1\text{mA}$	6			V
Reverse Leakage Current	I_R	$V_{RWM}=5\text{V}$			1	μA
Forward Voltage	V_F	$I_F=10\text{mA}$			1.2	V
Clamping Voltage ^(Note3)	V_C	$I_{PP}=10\text{A}$, $t_P=8/20\mu\text{s}$			9	V
		$I_{PP}=125\text{A}$, $t_P=8/20\mu\text{s}$			15	
Junction Capacitance	C_J	$V_R=0\text{V}$, $f=1\text{MHz}$			960	pF

ESD0771P6

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Reverse Working Voltage	V_{RWM}				7	V
Reverse Breakdown Voltage	V_{BR}	$I_T = 1\text{mA}$	7.5			V
Reverse Leakage Current	I_R	$V_{RWM}=7\text{V}$			0.5	μA
Forward Voltage	V_F	$I_F=10\text{mA}$			1.2	V
Clamping Voltage ^(Note3)	V_C	$I_{PP}=10\text{A}$, $t_P=8/20\mu\text{s}$			12	V
		$I_{PP}=115\text{A}$, $t_P=8/20\mu\text{s}$			16.5	
Junction Capacitance	C_J	$V_R=0\text{V}$, $f=1\text{MHz}$			550	pF

ESD1271P6

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Reverse Working Voltage	V_{RWM}				12	V
Reverse Breakdown Voltage	V_{BR}	$I_T = 1\text{mA}$	12.6			V
Reverse Leakage Current	I_R	$V_{RWM}=12\text{V}$			0.1	μA
Forward Voltage	V_F	$I_F=10\text{mA}$			1.2	V
Clamping Voltage ^(Note3)	V_C	$I_{PP}=10\text{A}$, $t_P=8/20\mu\text{s}$			18	V
		$I_{PP}=75\text{A}$, $t_P=8/20\mu\text{s}$			25	
Junction Capacitance	C_J	$V_R=0\text{V}$, $f=1\text{MHz}$			500	pF

Electrical Characteristics ($T_A=25^{\circ}\text{C}$ unless otherwise specified)

ESD2471P6

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Reverse Working Voltage	V_{RWM}				24	V
Reverse Breakdown Voltage	V_{BR}	$I_T = 1\text{mA}$	26.7			V
Reverse Leakage Current	I_R	$V_{RWM}=24\text{V}$			0.1	μA
Forward Voltage	V_F	$I_F=10\text{mA}$			1.2	V
Clamping Voltage ^(Note3)	V_C	$I_{PP}=10\text{A}$, $t_P=8/20\mu\text{s}$			42	V
		$I_{PP}=35\text{A}$, $t_P=8/20\mu\text{s}$			53.5	
Junction Capacitance	C_J	$V_R=0\text{V}$, $f=1\text{MHz}$			200	pF

ESD3671P6

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Reverse Working Voltage	V_{RWM}				36	V
Reverse Breakdown Voltage	V_{BR}	$I_T = 1\text{mA}$	37			V
Reverse Leakage Current	I_R	$V_{RWM}=36\text{V}$			0.5	μA
Forward Voltage	V_F	$I_F=10\text{mA}$			1.2	V
Clamping Voltage ^(Note3)	V_C	$I_{PP}=10\text{A}$, $t_P=8/20\mu\text{s}$			60	V
		$I_{PP}=25\text{A}$, $t_P=8/20\mu\text{s}$			75	
Junction Capacitance	C_J	$V_R=0\text{V}$, $f=1\text{MHz}$			150	pF

Note:

3. Non-repetitive current pulse 8/20 μs exponential decay waveform according to IEC61000-4-5..

4. TLP parameter: $Z_0=50\Omega$, $t_P=100\text{ns}$, $t_r=2\text{ns}$, averaging window from 60ns to 80ns. R_{DYN} is calculated from 4A to 16A.

Curve Characteristics

Fig. 1 - 8 X 20 μ s Pulse Waveform

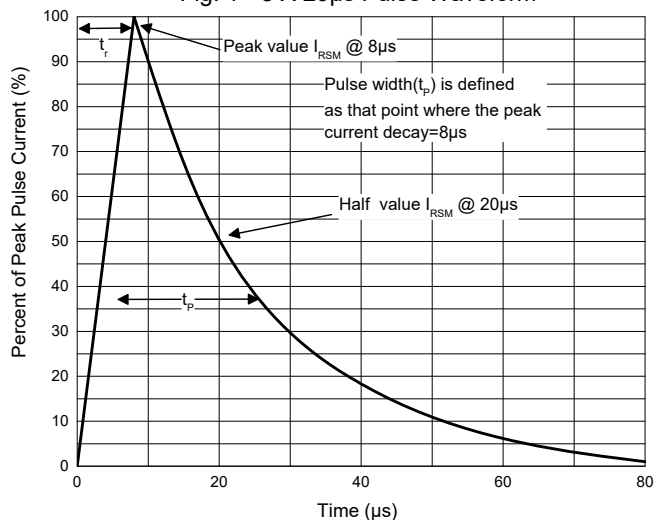


Fig. 2 - Non-Repetitive Peak Pulse Power

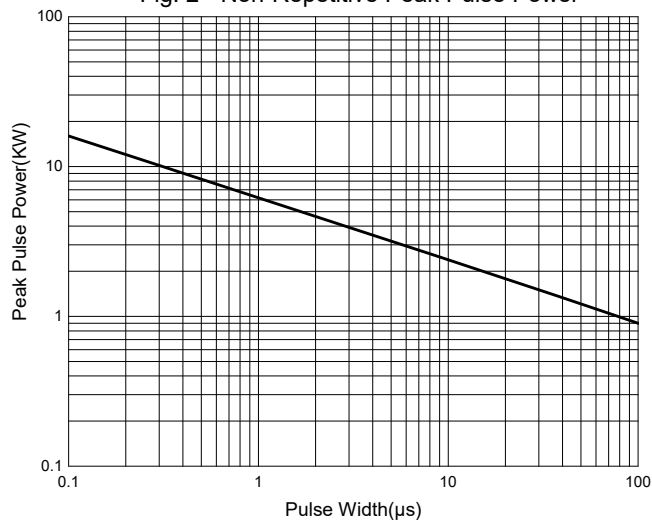


Fig. 3 - Clamping Voltage Characteristics



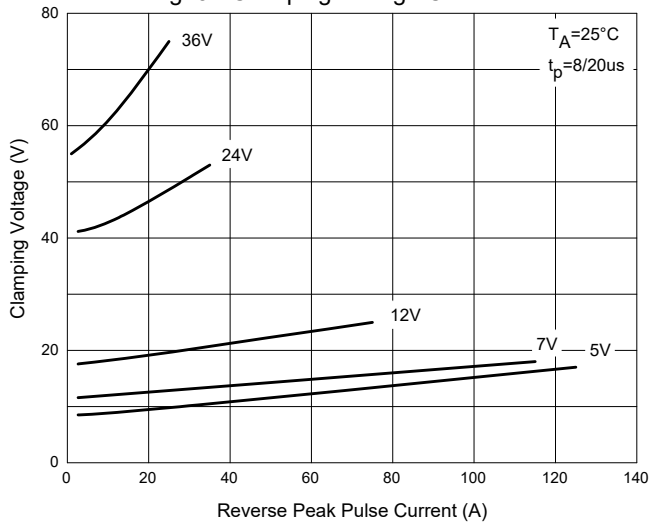


Fig. 4 - Pulse Derating Curve

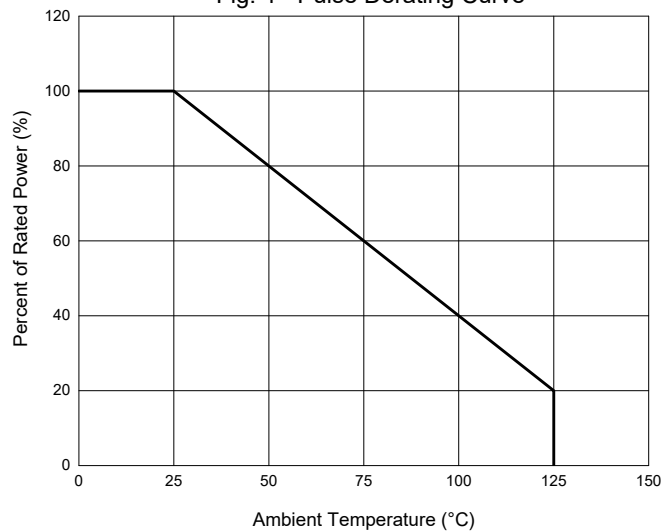


Package Outline

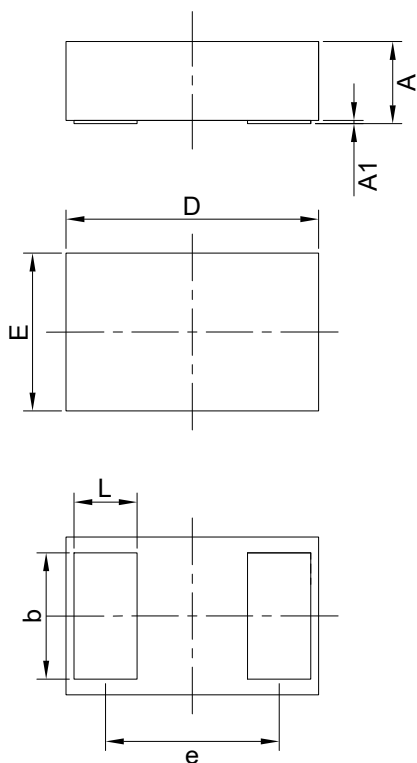

DIM	INCH		MM		NOTE
	MIN	MAX	MIN	MAX	
A	0.016	0.022	0.40	0.55	
A1	0.000	0.002	0.00	0.05	
b	0.030	0.033	0.75	0.85	
D	0.061	0.065	1.55	1.65	
e	0.043		1.10		TYP
E	0.037	0.041	0.95	1.05	
L	0.014	0.018	0.35	0.45	

Suggested Pad Layout (Unit:mm)

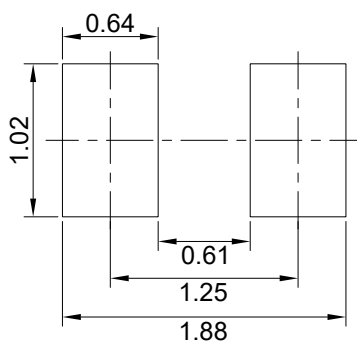

Notes:

1. The suggested land pattern dimensions have been provided for reference only.
2. For further information, please refer to document IPC-7351A.

DISCLAIMERS

Micro Commercial Components Corp. (MCC) reserves the right to make changes to any product without prior notice, including corrections, modifications, enhancements, improvements, or other changes. MCC's products are not designed, authorized, or warranted for use in medical, military, aircraft, space, or life support equipment, nor in applications where failure or malfunction of an MCC product can reasonably be expected to result in personal injury, death, or severe property or environmental damage. MCC does not assume liability for any application or use of the products described herein, nor does it convey any license under its patent rights or those of others. Users of MCC's products in any such application assume all risks associated with their use and agree to hold MCC and all companies whose products are represented on our website harmless against any damages. MCC's products are not authorized for use as critical components in life support devices or systems without the express written approval of MCC.

Counterfeiting of semiconductor parts is an increasing problem in the industry. MCC is taking strong measures to protect both ourselves and our customers from counterfeit products. We strongly encourage customers to purchase our parts either directly from MCC or through Authorized Distributors, who are listed by country on our website. Products purchased directly from MCC or from Authorized Distributors are genuine, have full traceability, and meet our quality standards for handling and storage. MCC will not provide warranty coverage or any other assistance for parts bought from Unauthorized Sources.

This document, along with the item(s) described within, may be subject to export control regulations. Exporting these items may require prior authorization from national authorities.

Terms and Conditions - MCC products are sold subject to the general terms and conditions of commercial sale, as published at <https://www.mccsemi.com/Home/TermsAndConditions>.