

### **Features**

- · Ideally Suited For Automatic Instertion
- Halogen Free. "Green" Device (Note 1)
- · Moisture Sensitivity Level 1
- Epoxy Meets UL 94 V-0 Flammability Rating
- Lead Free Finish/RoHS Compliant ("P" Suffix Designates RoHS Compliant. See Ordering Information)

# NPN General Purpose Amplifier

# Maximum Ratings @ 25°C Unless Otherwise Specified

Parameter	Symbol	Rating	Unit
Collector-Base Voltage	V <sub>CBO</sub>	75	V
Collector-Emitter Voltage	V <sub>CEO</sub>	40	V
Emitter-Base Voltage	V <sub>EBO</sub>	6	V
Collector Current	I <sub>C</sub>	0.6	Α
Collector Current-Peak <sup>(2)</sup>	I <sub>CM</sub>	1.1	Α
Power Dissipation	P <sub>D</sub>	350	mW

### Thermal characteristics

Parameter	Symbol	Rating	Unit
Junction Temperature Range	T <sub>j</sub>	-55~+150	°C
Storage Temperature Range	T <sub>stg</sub>	-55~+150	°C
Thermal Resistance from Junction to Ambient	Rth <sub>(J-A)</sub>	357	°C/W


#### Note:

- 1. Halogen free "Green" products are defined as those which contain <900ppm bromine, <900ppm chlorine (<1500ppm total Br + Cl) and <1000ppm antimony compounds.
- 2. pulse width≤40us.


# SOT-23

DIMENSIONS					
DIM		M	M	NOTE	
DIIVI	MIN	MAX	MIN	MAX	NOTE
Α	0.110	0.120	2.80	3.04	
В	0.083	0.104	2.10	2.64	
С	0.047	0.055	1.20	1.40	
D	0.034	0.041	0.85	1.05	
Е	0.067	0.083	1.70	2.10	
F	0.018	0.024	0.45	0.60	
G	0.0004	0.006	0.01	0.15	
Н	0.035	0.043	0.90	1.10	
J	0.003	0.007	0.08	0.18	
K	0.014	0.020	0.35	0.51	
L	0.007	0.020	0.20	0.50	


# **Internal Structure**



# **Device Marking**



# Suggested Solder Pad Layout






# Electrical Characteristics @ 25°C Unless Otherwise Specified


Parameter	Symbol	Min	Тур	Max	Units	Conditions
Collector-Base Breakdown Voltage*	V <sub>(BR)CBO</sub>	75			V	I <sub>C</sub> =10μA, I <sub>E</sub> =0
Collector-Emitter Breakdown Voltage	V <sub>(BR)CEO</sub>	40			V	I <sub>C</sub> =10mA, I <sub>B</sub> =0
Emitter-Base Breakdown Voltage	$V_{(BR)EBO}$	6			V	I <sub>E</sub> =10μA, I <sub>C</sub> =0
Collector Cutoff Current	I <sub>CEX</sub>			10	nA	V <sub>CE</sub> =60V,V <sub>BE</sub> =3V
	h <sub>FE1</sub>	35				V <sub>CE</sub> =10V, I <sub>C</sub> =0.1mA
	h <sub>FE2</sub>	50				V <sub>CE</sub> =10V, I <sub>C</sub> =1mA
DC Current Gain*	h <sub>FE3</sub>	75				V <sub>CE</sub> =10V, I <sub>C</sub> =10mA
DC Current Gain	h <sub>FE4</sub>	100		300		V <sub>CE</sub> =10V, I <sub>C</sub> =150mA
	h <sub>FE5</sub>	50				$V_{CE}$ =1V, $I_{C}$ =150mA
	h <sub>FE6</sub>	40				V <sub>CE</sub> =10V, I <sub>C</sub> =500mA
Collector-Emitter Saturation Voltage	V <sub>CE(sat)</sub>			0.3	V	I <sub>C</sub> =150mA, I <sub>B</sub> =15mA
				1.0	V	I <sub>C</sub> =500mA, I <sub>B</sub> =50mA
Dana Fraittan Caturation Valtage	V <sub>BE(sat)</sub>	0.6		1.2	V	I <sub>C</sub> =150mA, I <sub>B</sub> =15mA
Base-Emitter Saturation Voltage				2.0	V	I <sub>C</sub> =500mA, I <sub>B</sub> =50mA
Transition Frequency	f <sub>T</sub>	300			MHz	V <sub>CE</sub> =20V, I <sub>C</sub> =20mA, f=100MHz
Output Capacitance	C <sub>obo</sub>			8	pF	V <sub>CB</sub> =10V, I <sub>E</sub> =0, f=1MHz
Input Capacitance	C <sub>ibo</sub>			45	pF	$V_{BE}$ =0.5V, $I_{C}$ =0, f=1MHz
Noise Figure	NF			4	dB	$V_{CE}$ =10V, $I_{C}$ =100uA, f=1kHz, $R_{S}$ =1k $\Omega$
Delay Time	t <sub>d</sub>			10	ns	V <sub>CC</sub> =30V, V <sub>BE</sub> =0.5V
Rise Time	t <sub>r</sub>			25	ns	I <sub>C</sub> =150mA, I <sub>B1</sub> =15mA
Storage Time	t <sub>s</sub>			225	ns	V <sub>CC</sub> =30V, I <sub>C</sub> =150mA
Fall Time	t <sub>f</sub>			60	ns	I <sub>B1</sub> =I <sub>B2</sub> =15mA


<sup>\*</sup>Pluse Width  $\leq$  300 $\mu$ s, Duty Cycle  $\leq$  2.0%





# **Curve Characteristics**

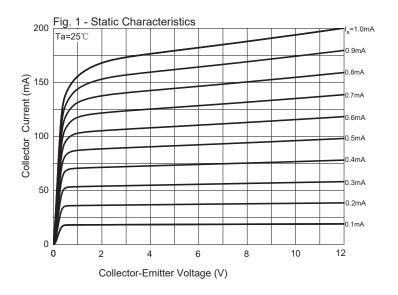


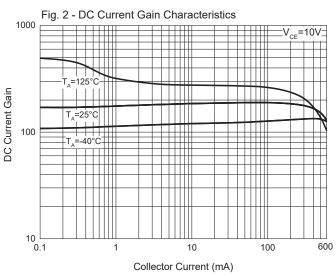

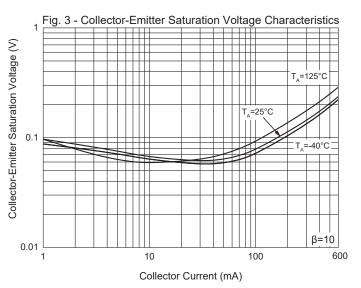

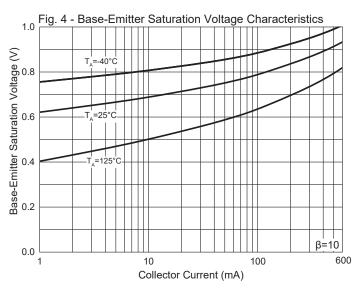

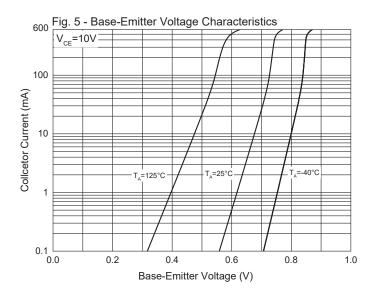

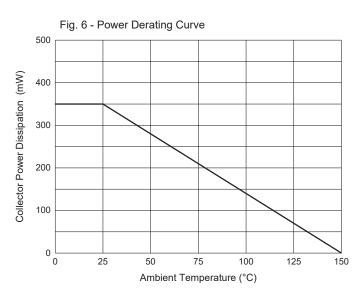



## **Ordering Information**

Device	Packing		
Part Number-TP	Tape&Reel 3Kpcs/Reel		

#### \*\*\*IMPORTANT NOTICE\*\*\*

**Micro Commercial Components Corp.** reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. **Micro Commercial Components Corp**. does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold **Micro Commercial Components Corp**, and all the companies whose products are represented on our website, harmless against all damages.

#### \*\*\*LIFE SUPPORT\*\*\*

MCC's products are not authorized for use as critical components in life support devices or systems without the express written approval of Micro Commercial Components Corporation.

#### \*\*\*CUSTOMER AWARENESS\*\*\*

Counterfeiting of semiconductor parts is a growing problem in the industry. Micro Commercial Components (MCC) is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. MCC strongly encourages customers to purchase MCC parts either directly from MCC or from Authorized MCC Distributors who are listed by country on our web page cited below. Products customers buy either from MCC directly or from Authorized MCC Distributors are genuine parts, have full traceability, meet MCC's quality standards for handling and storage. MCC will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources. MCC is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

Rev.4-1-08262023 4/4 MCCSEMI.COM