

## Features

- Halogen Free Available Upon Request By Adding Suffix "-HF"
- Lead Free Finish/RoHS Compliant(Note 1) ("P" Suffix Designates Compliant. See Ordering Information)
- Epoxy Meets UL 94 V-0 Flammability Rating
- Guard Ring For Transient Protection
- High Surge Capacity, High Current Capability

## Maximum Ratings @ 25°C (Unless Otherwise Specified)

Parameter	Symbol	Value			Unit
		MBR1640FCT	MBR1660FCT	MBR16100FCT	
Peak Repetitive Reverse Voltage	$V_{RRM}$	40	60	100	V
Working Peak Reverse Voltage	$V_{RWM}$				
DC Blocking Voltage	$V_R$				
RMS Reverse Voltage	$V_{RMS}$	28	42	70	V
Average Rectified Forward Current	$I_{F(AV)}$	8 16			A
Per Diode Per Device					
Non-Repetitive Peak Surge Current @ 8.3ms Half Sine Wave	$I_{FSM}$	150			A
Current Squared Time @ $1ms \leq t \leq 8.3ms$	$I^2t$	93			A <sup>2</sup> s


Part Number	Marking Code
MBR1640FCT	MBR1640FCT
MBR1660FCT	MBR1660FCT
MBR16100FCT	MBR16100FCT

Marking Diagram	Internal Structure

Note: 1. High Temperature Solder Exemption Applied, see EU Directive Annex 7a.

# 16 Amp Schottky Barrier Rectifier 40 to 100 Volts

## ITO-220AB

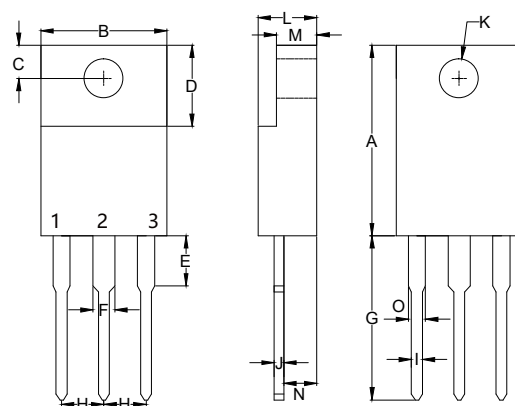

DIMENSIONS					
DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	0.567	0.642	14.40	16.30	
B	-----	0.421	-----	10.70	
C	0.085	0.128	2.15	3.25	
D	0.248	0.272	6.30	6.90	
E	-----	0.177	-----	4.50	
F	-----	0.071	-----	1.80	
G	0.500	0.539	12.70	14.20	
H	0.100		2.55		
I	-----	0.035	-----	0.90	
J	-----	0.032	-----	0.80	
K	0.102	0.150	2.60	3.80	Φ
L	-----	0.201	-----	5.10	
M	-----	0.140	-----	3.56	
N	0.083	0.126	2.10	3.20	
O	-----	0.071	-----	1.80	

## Thermal characteristics

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
$T_J$	Operating Junction Temperature Range		-55		150	°C
$T_{stg}$	Storage Temperature Range		-55		150	°C
$R_{th(J-C)}$	Thermal Resistance from Junction to Case	Per Leg		4		°C/W
$R_{th(J-A)}$	Thermal Resistance from Junction to Ambient	Without Heatsink, Free air		60		°C/W

## Mechanical Data

Recommended Mounting Torque: 5in·lbs

## Electrical Characteristics @ 25°C Unless Otherwise Specified

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Forward Voltage Per Diode						
MBR1640FCT	$V_F$	$I_F=8A; T_J=25^{\circ}C$		0.53	0.55	V
		$I_F=8A; T_J=125^{\circ}C$		0.48		
MBR1660FCT		$I_F=8A; T_J=25^{\circ}C$		0.66	0.75	
		$I_F=8A; T_J=125^{\circ}C$		0.58		
MBR16100FCT		$I_F=8A; T_J=25^{\circ}C$		0.77	0.85	
		$I_F=8A; T_J=125^{\circ}C$		0.62		
Reverse Current Per Diode	$I_R$	at Rated $V_R; T_J=25^{\circ}C$ at Rated $V_R; T_J=100^{\circ}C$			0.1 20	mA
Junction Capacitance Per Diode						
MBR1640FCT	$C_J$	$V_R=4V; f=1MHz; T_J=25^{\circ}C$		335		pF
MBR1660FCT				275		
MBR16100FCT				270		

## Curve Characteristics

Fig. 1 - Forward Current Derating Curve

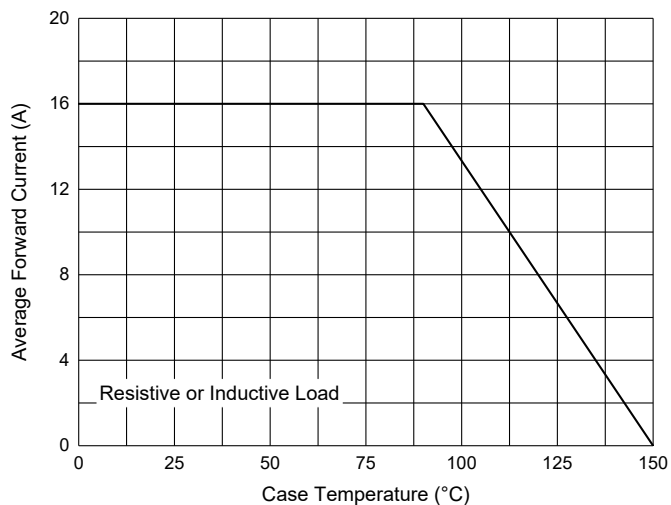


Fig. 2 - Maximum Non-Repetitive Peak Forward Surge Current Per Diode

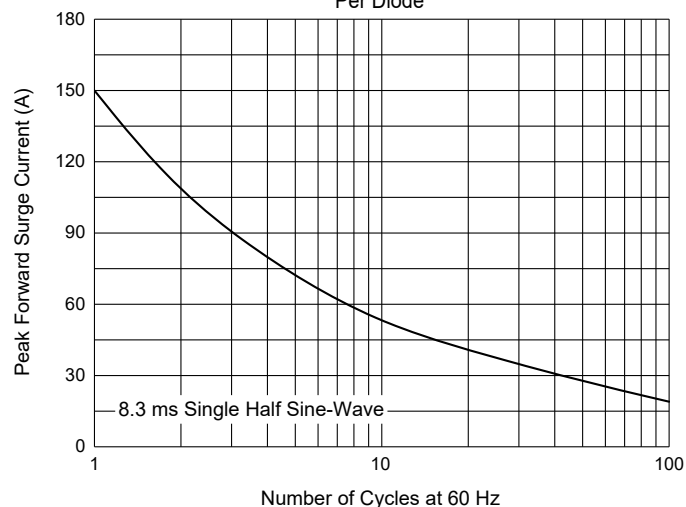


Fig. 3 - Typical Forward Characteristics Per Diode

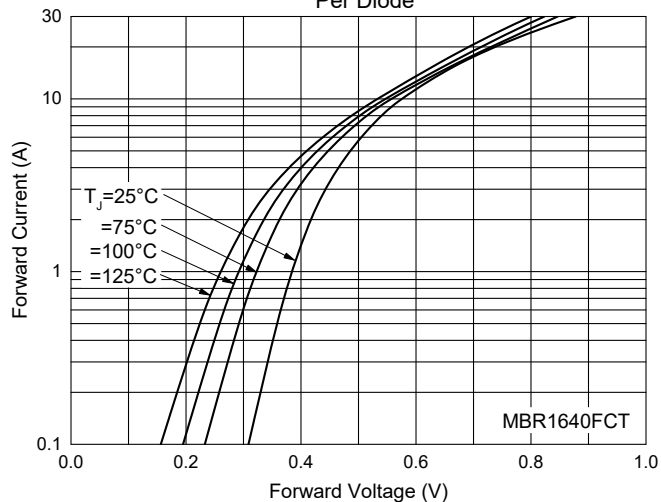


Fig. 4 - Typical Reverse Leakage Characteristics Per Diode

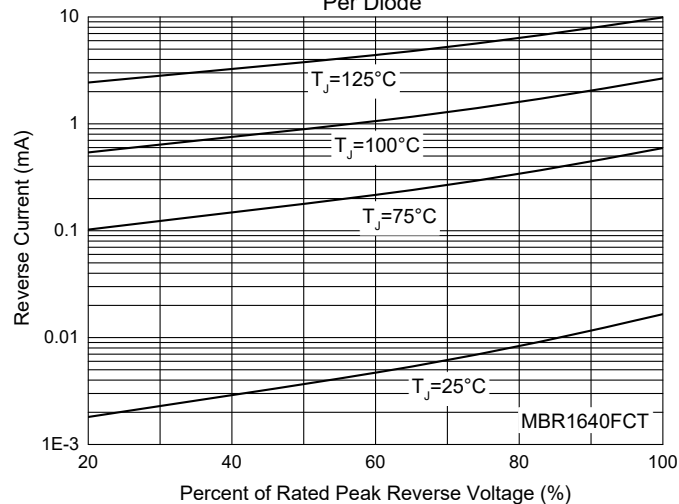


Fig. 5 - Typical Forward Characteristics Per Diode


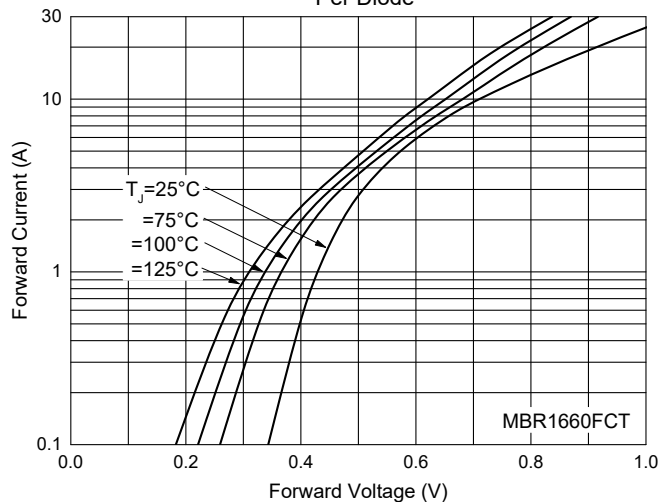


Fig. 6 - Typical Reverse Leakage Characteristics Per Diode

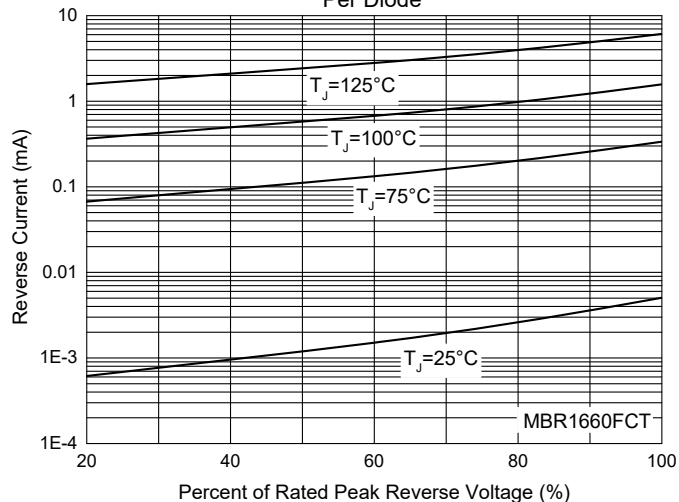

## Curve Characteristics

Fig. 7 - Typical Forward Characteristics  
Per Diode

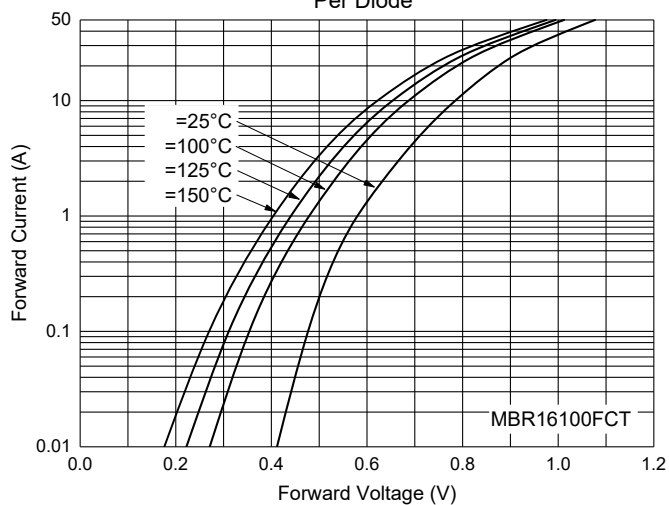


Fig. 8 - Typical Reverse Leakage Characteristics  
Per Diode

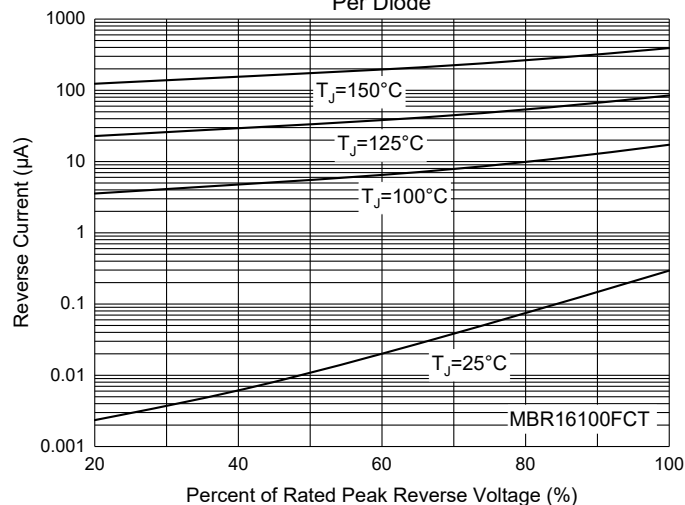


Fig. 9 - Typical Capacitance Characteristics  
Per Diode


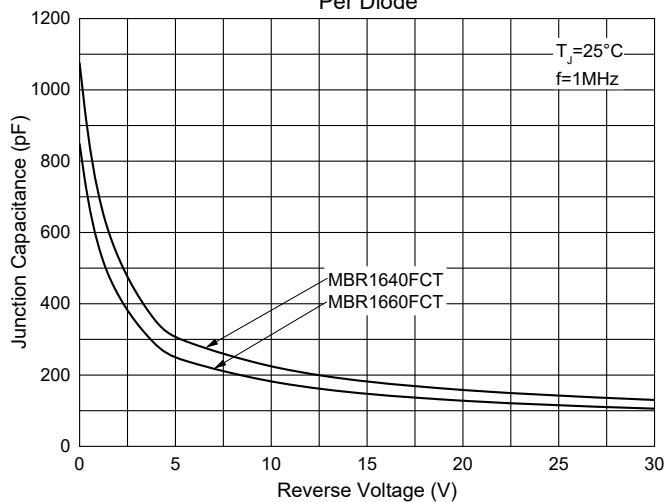


Fig. 10 - Typical Capacitance Characteristics  
Per Diode

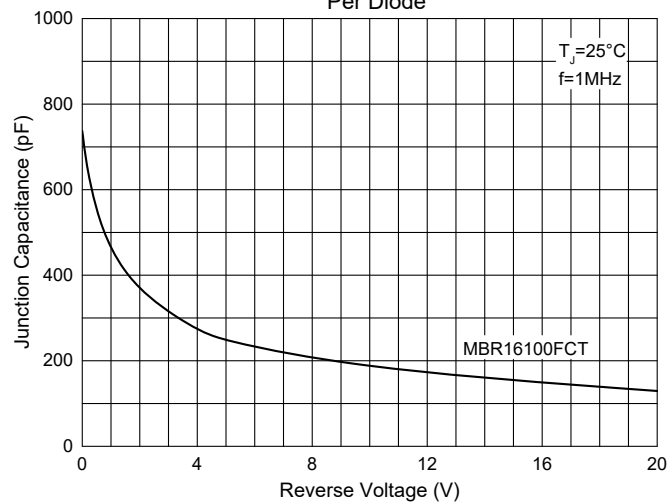

## Ordering Information

Device	Packing
Part Number-BP	Bulk:50pcs/Tube, 1Kpcs/Box, 5Kpcs/Carton

Note : Adding "-HF" Suffix For Halogen Free, eg. Part Number-BP-HF

### \*\*\*IMPORTANT NOTICE\*\*\*

**Micro Commercial Components Corp.** reserves the right to make changes without further notice to any product herein to make corrections, modifications , enhancements , improvements , or other changes . **Micro Commercial Components Corp** . does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights ,nor the rights of others . The user of products in such applications shall assume all risks of such use and will agree to hold **Micro Commercial Components Corp** . and all the companies whose products are represented on our website, harmless against all damages. **Micro Commercial Components Corp.** products are sold subject to the general terms and conditions of commercial sale, as published at <https://www.mccsemi.com/Home/TermsAndConditions>.

### \*\*\*LIFE SUPPORT\*\*\*

MCC's products are not authorized for use as critical components in life support devices or systems without the express written approval of Micro Commercial Components Corporation.

### \*\*\*CUSTOMER AWARENESS\*\*\*

Counterfeiting of semiconductor parts is a growing problem in the industry. Micro Commercial Components (MCC) is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. MCC strongly encourages customers to purchase MCC parts either directly from MCC or from Authorized MCC Distributors who are listed by country on our web page cited below. Products customers buy either from MCC directly or from Authorized MCC Distributors are genuine parts, have full traceability, meet MCC's quality standards for handling and storage. **MCC will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources.** MCC is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.