



Micro Commercial Components

Micro Commercial Components
20736 Marilla Street Chatsworth
CA 91311
Phone: (818) 701-4933
Fax: (818) 701-4939

SD101A THRU SD101C

Small Signal Schottky Diodes

Features

- Lead Free Finish/Rohs Compliant (Note1) ("P" Suffix designates Compliant. See ordering information)
- Low Reverse Recovery Time
- Low Reverse Capacitance
- Low Forward Voltage Drop
- Guard Ring Construction for Transient Protection

Mechanical Data

- Case: DO-35, Glass
- Terminals: Solderable per MIL-STD-202, Method 208
- Polarity: Indicated by Cathode Band
- Moisture Sensitivity: Level 1 per J-STD-020C

Maximum Ratings @ 25°C Unless Otherwise Specified

Characteristic	Symbol	SD101A	SD101B	SD101C
Peak Repetitive Reverse Voltage	V_{RRM}			
Working Peak Reverse Voltage	V_{RWM}	60V	50V	40V
DC Blocking Voltage	V_R			
RMS Reverse Voltage	$V_{R(RMS)}$	42V	35V	28V
Maximum single cycle surge 10us square wave	I_{FSM}	2.0A		
Power Dissipation(Note 2)	P_d	400mW		
Thermal Resistance, Junction to Ambient	R	300K/W		
Junction Temperature	T_j	125°C		
Operation/Storage Temp. Range	T_{STG}	-55 to +150°C		

Electrical Characteristics @ 25°C Unless Otherwise Specified

Parameter	Symbol	Max	Test Condition	
Leakage Current	I_R	200nA	$V_R=50V$	
		200nA	$V_R=40V$	
		200nA	$V_R=30V$	
Maximum Forward Voltage Drop	V_F	0.41V	$I_F=1mA$	
		0.4V		$I_F=15mA$
		0.39V		
		1V		
		0.95V		
	0.9V			
Junction Cap.	C_j	2.0pF	$V_R=0V, f=1.0MHz$	
		2.1pF		
		2.2pF		
Reverse Recovery Time	t_{rr}	1ns	$I_F=I_R=50mA, \text{recover to } 200mA/0.1I_R$	

Note: 1. Lead in Glass Exemption Applied, see EU Directive Annex 5.
2. Valid provided that electrodes are kept at ambient temperature

DO-35

The diagram shows a side view of a DO-35 diode. Dimension A is the height of the main body. Dimension B is the width of the main body. Dimension C is the diameter of the lead. Dimension D is the total height including the lead. A shaded band on the main body is labeled 'Cathode Mark'.

DIMENSIONS					
DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	---	.166	---	4.2	
B	---	.079	---	2.00	
C	---	.020	---	.52	
D	1.000	---	25.40	---	

SD101A thru SD101C

Figure 1. Typical variation of forward current vs. fwd. Voltage for primary conduction through the schottky barrier

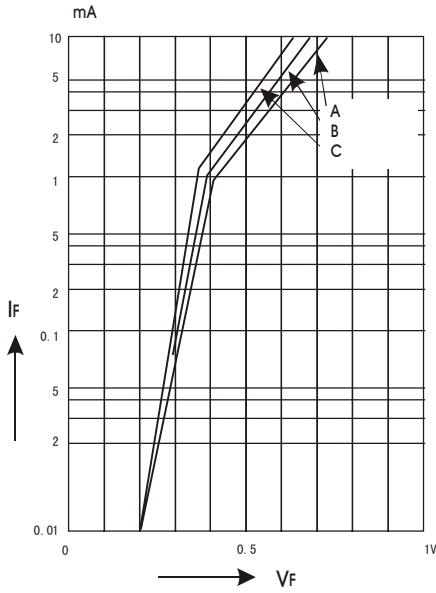


Figure 2. Typical forward conduction curve of combination Schottky barrier and PN junction guard ring

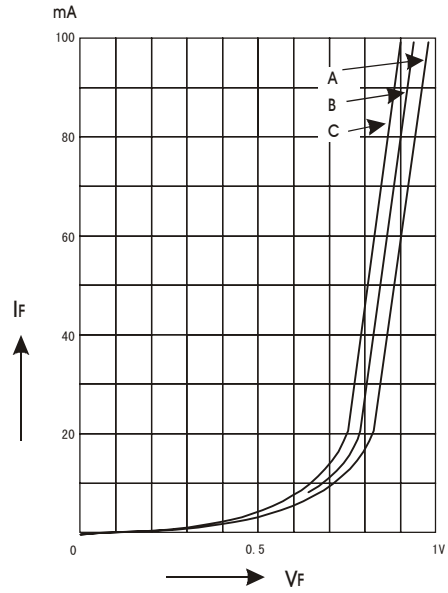


Figure 3. Typical variation of reverse current at versus temperature


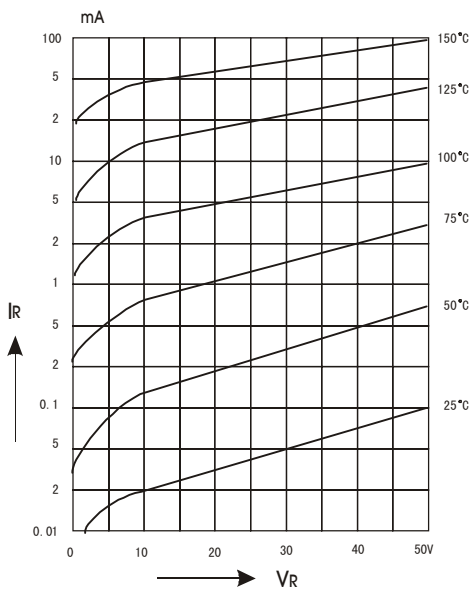


Figure 4. Typical capacitance curve as a function of reverse voltage



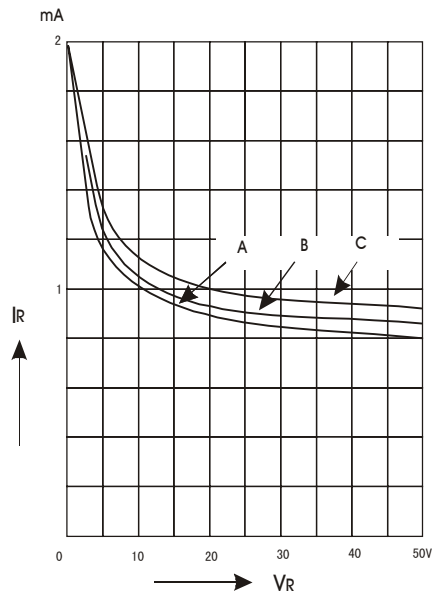

Micro Commercial Components

Ordering Information

Device	Packing
(Part Number)-TP	Tape&Reel; 10Kpcs/Reel
(Part Number)-AP	Ammo Packing;5Kpcs/AmmoBox
(Part Number)-BP	Bulk;500pcs/Bag

*****IMPORTANT NOTICE*****

Micro Commercial Components Corp. reserve the right to make changes without further notice to any product herein to make corrections, modifications , enhancements , improvements , or other changes . *Micro Commercial Components Corp.* does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights ,nor the rights of others . The user of products in such applications shall assume all risks of such use and will agree to hold *Micro Commercial Components Corp.* and all the companies whose products are represented on our website, harmless against all damages.

*****APPLICATIONS DISCLAIMER*****

Products offer by *Micro Commercial Components Corp.* are not intended for use in Medical, Aerospace or Military Applications.